

INDOOR 3 AXIS DOME CAMERA

High Resolution 600TV Lines
 80Ø Internal Dome Camera
 Min. Illumination of 0.01Lux
 3Axis Gimbal Bracket
 OSD Control
 Video Test Output
 Easy Adjustment Zoom & Focus
 D-WDR / 2D DNR / IR SMART




Specification


Model: VP-2744A

ITEM	NTSC	PAL
Total Pixels	811(H) x 508(V)	795(H) x 596(V)
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)
Sensor	1/3" Sony Super HAD II CCD	
Scanning System	2:1 Interlace	
Frequency	NTSC : Horizontal :15.734KHzVertical : 59.94Hz PAL : Horizontal :15.625KHzVertical : 50.00Hz	
Resolution	More than 600 TV Lines	
Video Output	1.0Vp-p Composite Signal (75ohm)	
S/N (Y signal)	52dB or more (AGC OFF)	
Min. Illumination	0.01Lux	
Gain Control	OFF / LOW / MIDDLE / HIGH	
White Balance	ATW1(2300°K~9500°K)/ATW2(2000°K~11000°K)/MANUAL	
Electronic shutter speed	1/60s - 1/100,000s	1/50s - 1/100,000s
Back light(BLC)	OFF / BLC / HLC Selectable	
2D-DNR	ON / OFF Selectable	
D&N Selection	AUTO / COLOR / BW / EXT	
D-WDR	ON / OFF Selectable(Level Adjustable 0~35)	
Dead Pixel(DPC)	OFF / Auto(Max 64points)	
IR SMART	ON / OFF Selectable(IR GAIN Level Adjustable 0~ 255)	
Motion Detection	OFF / ON(4Areas Selectable)	
Privacy Masking	OFF / ON(8Masks Selectable)	
Lens Shading(LSC)	ON / OFF Selectable(Level Adjustable 0~255)	
SHARPNESS	ON / OFF (Level Adjustable 0~30)	
O.S.D	Available	
Lens Mount	4~9mm DC Auto Iris	
Operating temperature/Humidity	-10℃ ~+50℃ / 0~80% RH	
Power Supply	DC12V 100mA	
Dimensions	112(W)mm X 87(D)mm	
Weight	Appx. 200g	


Zoom & Focal Adjustment

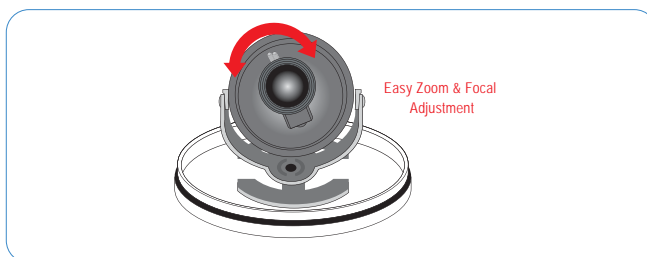

Installation

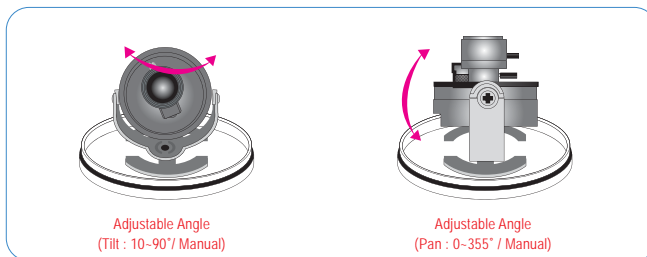

Functions

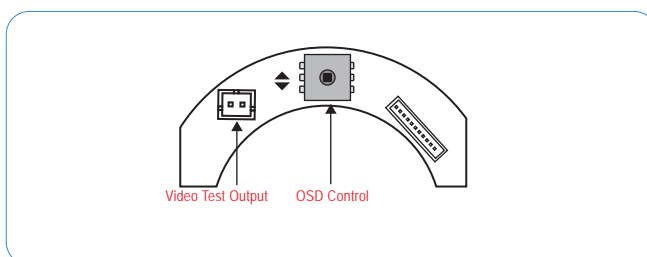

Dimension

